

usine c

TECHNICAL RIDER

VENUE 2

TECHNICAL DIRECTOR

CHANI LEBOVICI

514 549 4730

ASSISTANT TECHNICAL DIRECTOR

MARIANNE LAPOINTE

514 521-4198 #225

dt@usine-c.com

1345 av. Lalonde

Montréal, Québec

H2L 5A9

Tel : 514-521-4198

Fax : 514-521-3681

usine-c.com

TABLES OF CONTENTS

CONTACT INFORMATION.....	3
ADDRESS.....	3
LOADING DOCK.....	3
LOADING DOCK AVENUE LALONDE.....	3
LOADING DOCK AVENUE DELORME.....	3
ELEVATOR.....	3
VENUE.....	4
STANDARD CONFIGURATION.....	4
BLEACHERS.....	4
VENUE DIMENSIONS.....	4
STAGE.....	4
FLOOR.....	4
DRESSING ROOMS.....	4
FLYING SYSTEM.....	5
MOTORS.....	5
DANCE CARPET.....	5
WOODEN DANCE FLOOR.....	6
STAGE CURTAINS.....	6
LEGS.....	6
BORDERS.....	6
BACKDROPS.....	6
TRAVELLERS.....	6
NAVY SCRIM.....	6
CYCLORAMA.....	6
STAGE LIGHTING.....	7
STAGE LIGHTING CONTROL.....	7
LIGHTING EQUIPMENTS.....	7
LIGHTING EQUIPMENTS - DEL.....	7
SMOKE MACHINES.....	8
ACCESSORIES.....	8
ELECTRICITY POWER.....	8
SOUND.....	9
MIXING BOARD.....	9
MAIN SOUND SYSTEM.....	9
MICROPHONES AND DIRECT BOX.....	9
MIC STANDS.....	9
WIRELESS MICROPHONE SYSTEM.....	10
INTERCOM.....	10
COMPUTER.....	10
VIDEO.....	11
VIDEO PROJECTORS.....	11
PROJECTION SCREEN.....	11
VIDEO DISTRIBUTION.....	12
STAGE EQUIPMENTS.....	12
GROUND SUPPORT SYSTEM CURTAIN.....	12

CONTACT INFORMATION

ADDRESS

Main entrance / Artist entrance / Loading dock

1345 av. Lalonde, Montréal, Québec


H2L 5A9

514-521-4198

Café de l'Usine C /

Acces for people with reduced mobility

1901 rue de la Visitation

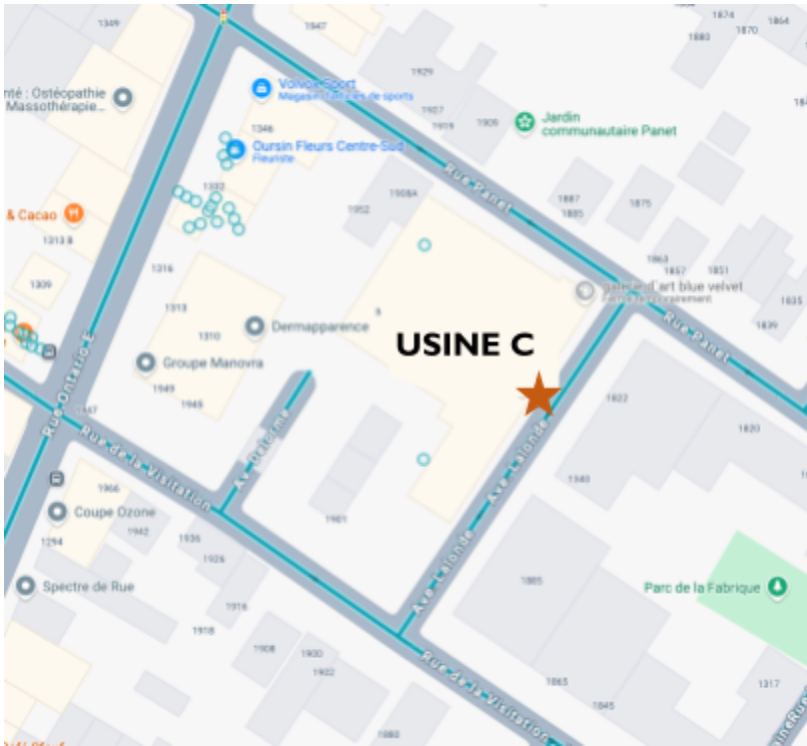

LOADING DOCK

* Contact the Technical Director to be guided at the appropriate dock.

** Please advise the Technical Director if the truck is more than 7,32m / 25'-0" , in that case, some parking spots must be saved.

LOADING DOCK AVENUE LALONDE

Street level

Outside door dimensions

Width : 2,39m / 7'-10"

Height : 3,23m / 10'-7"

Inside door dimensions

Width : 1,55m / 5'-1"

Height : 2,39m / 7'-10"



LOADING DOCK AVENUE DELORME

Loading dock at the end of Delorme Street

Height difference with the street : 25,4 cm / 10"

Height difference with the stage : 1,05m / 3'-5"

Outside door dimensions

Width : 2,36m / 7'-9"


Height : 3,63m / 11'-11"

Elevator Scissor lift type

Width : 3,05m / 10'-0"

Height : 1,83m / 6'-0"

Weight load : 2700 kg/ 5950 lb

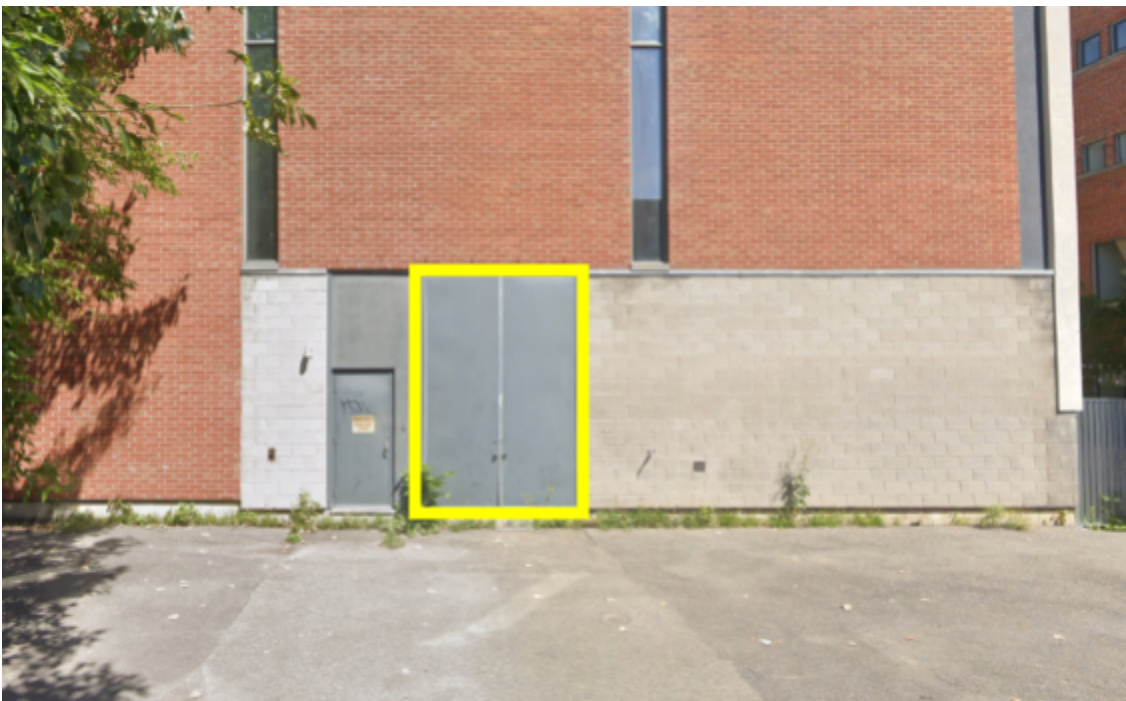

ELEVATOR

Width : 1,07m / 3'-6"

Height : 2,13m / 7'-0"

VENUE

Variable geometry room

STANDARD CONFIGURATION


Number of seats : 96

Height of the last bleacher : 1,8m / 6’-0’’

Playing area : Width : 12,20m / 40’-0’’

Depth : 10,30m / 35’-0’’

*Other configurations can be sets. Charges apply.

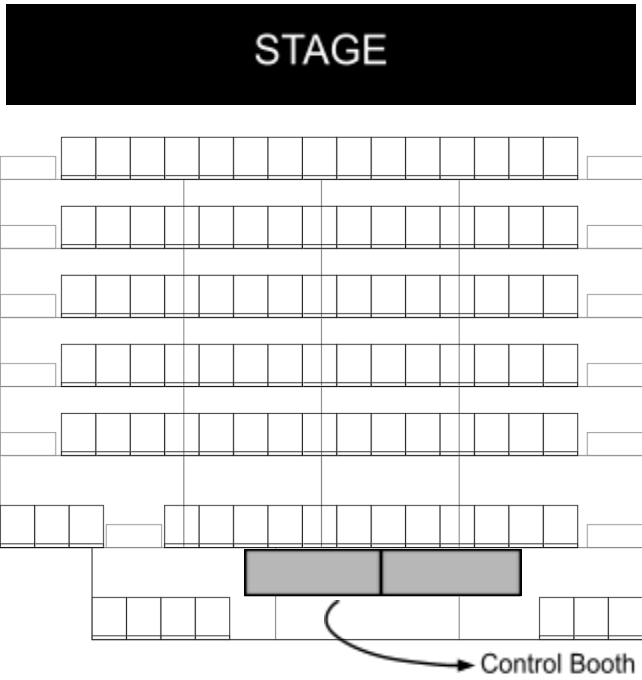

BLEACHERS

Black risers	1,2m x 2,4m	4’-0’’ x 8’-0’’	13
Black risers	1,2m x 1,8m	4’-0’’ x 6’-0’’	10

Guardrail	1,3 m	3’-11’’	5
Guardrail	1,22m	4’-0’’	3
Guardrail	2,44m	8’-0’’	5

VENUE DIMENSIONS

Depth	18,30m	60’-0’’
Width	12,20m	40’-0’’

STAGE

No total blackout will be tolerated. Regulation respecting safety in public buildings cs-3, r.4, a.22

FLOOR

Cement slab floor

*It may not be painted, screwed, nailed or stapled into.

Weight load : 150 lb / square foot

DRESSING ROOMS

Numbers of dressing room : 3

Capacity per dressing room : 10. Open area.


Non individual.

2 shower rooms with 3 showers each.

Equipment available : 2 Washing machines, 1 dryer, table and flat iron, steam iron, sewing machine and little repairs kit.

Devis Technique – Salle 2 USINE C

FLYING SYSTEM

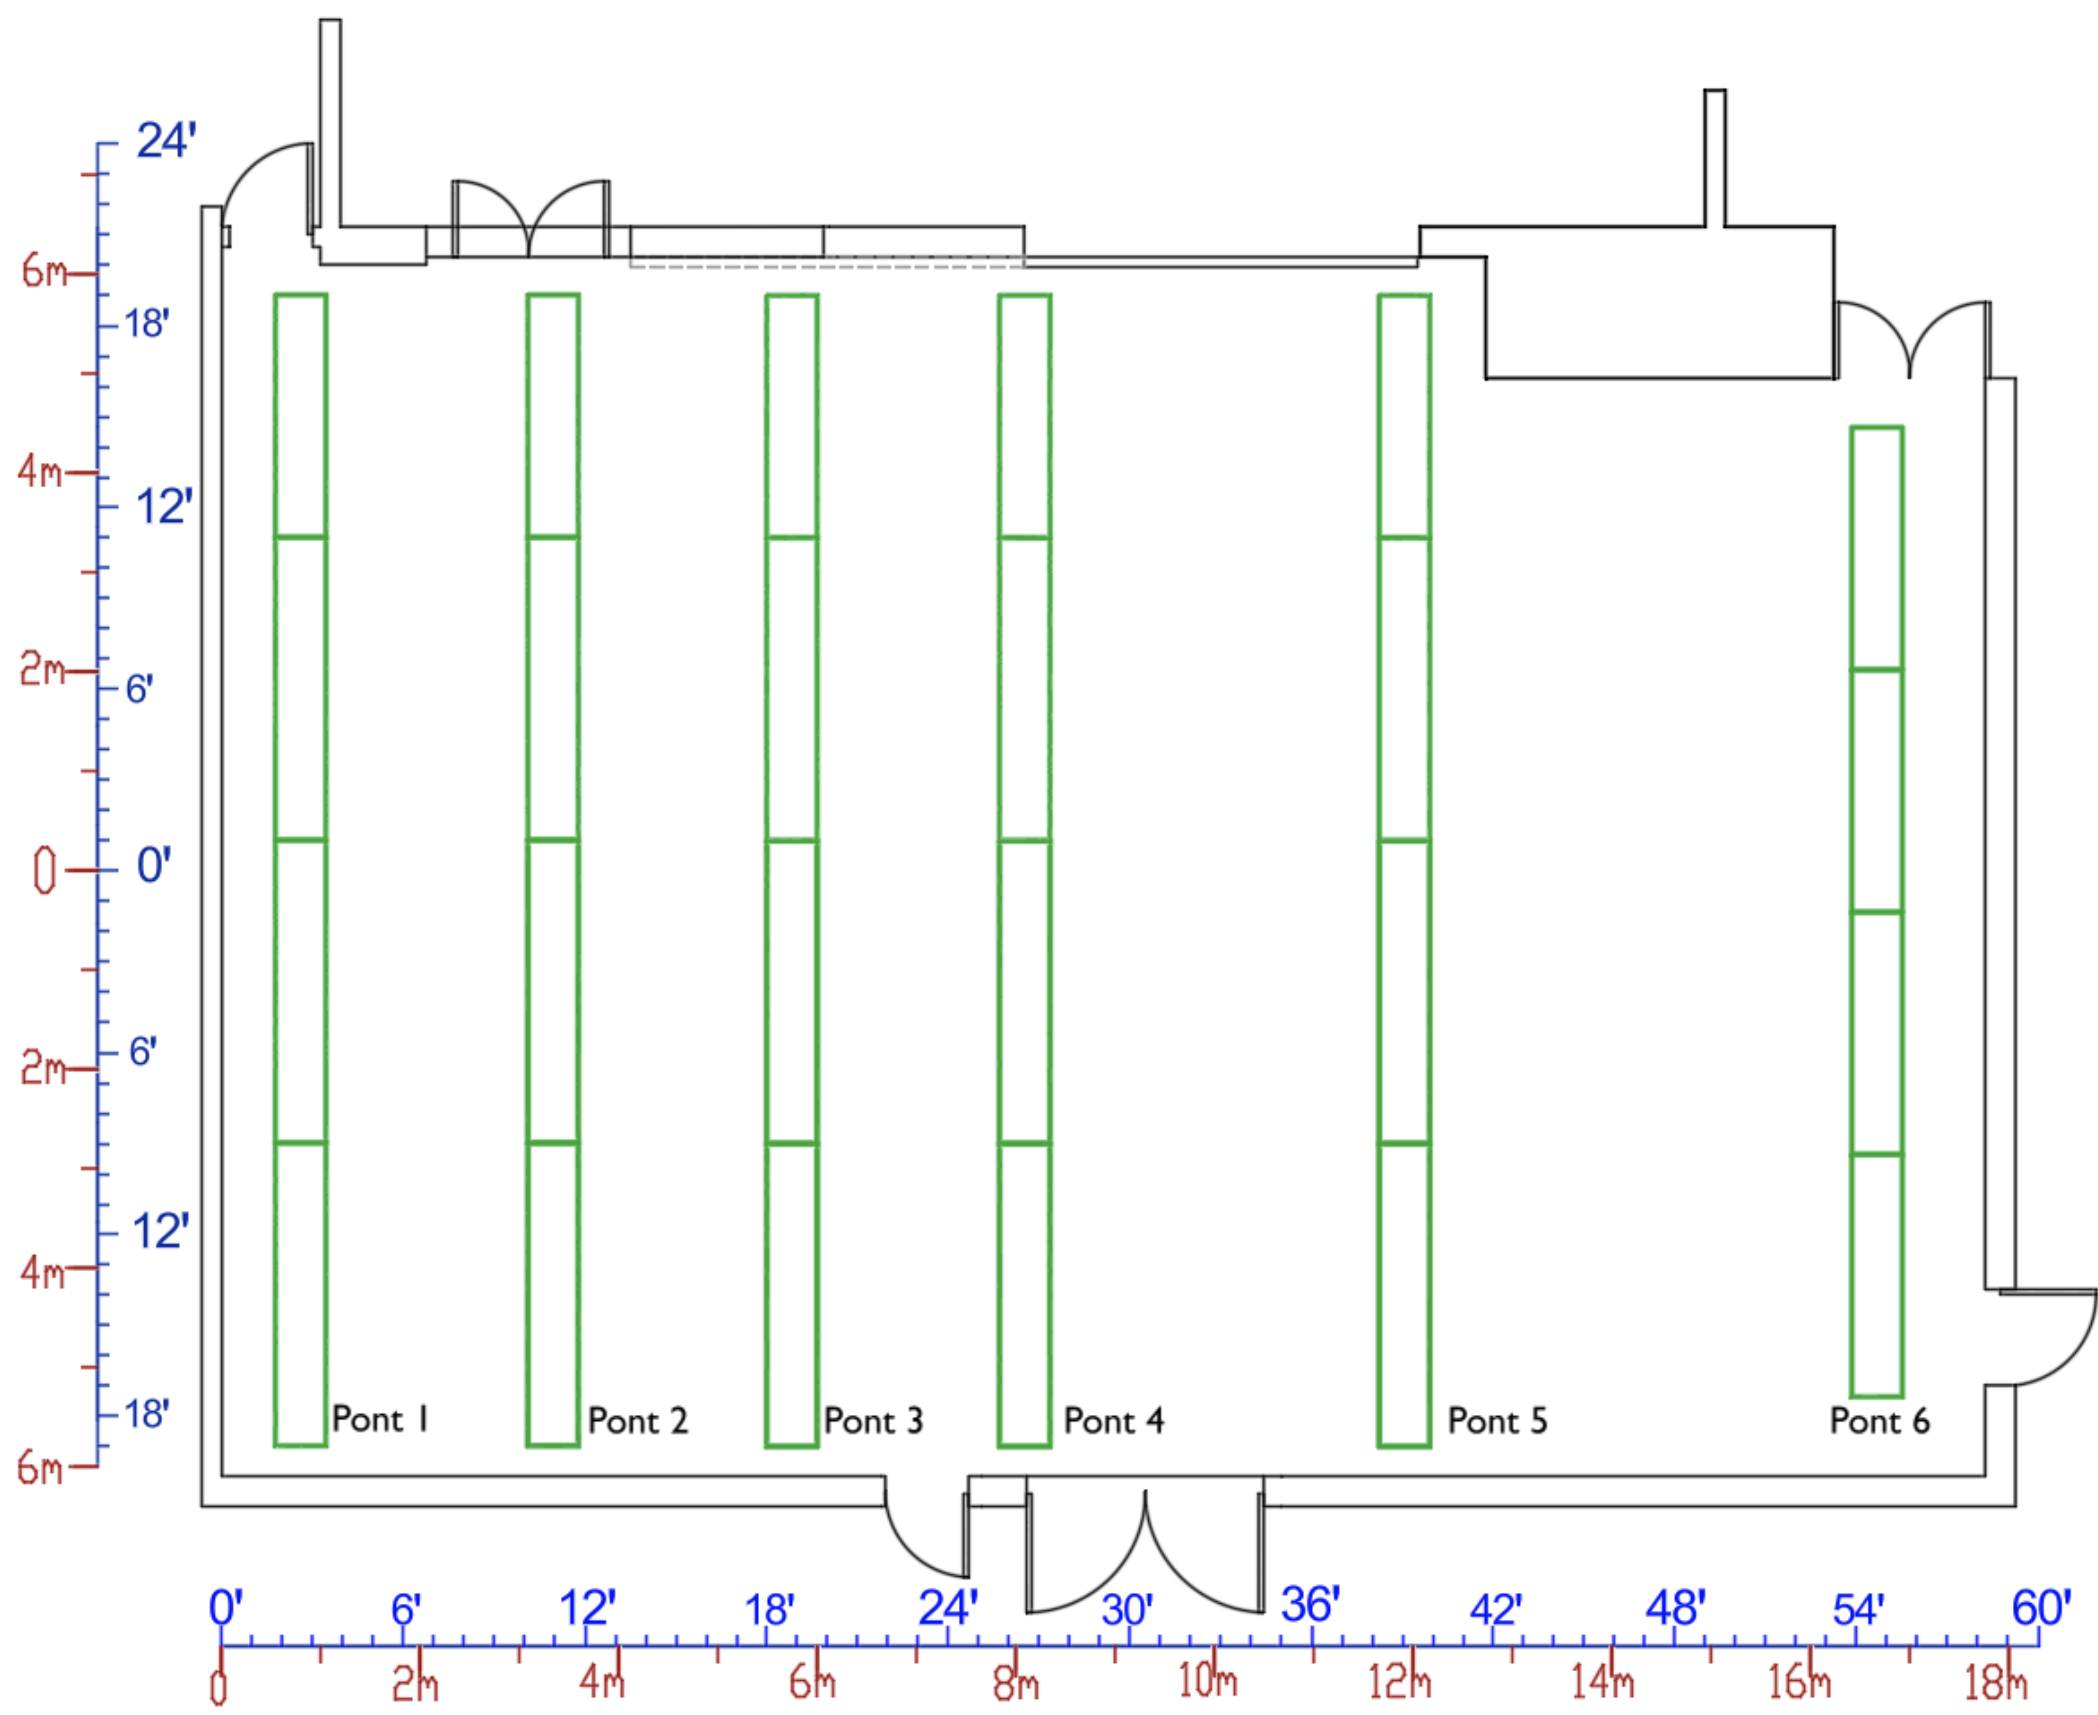

Truss	Dimensions	Maximum weight load distributed	Single point load
1 to 5	11,6m / 38'-0"	180kg / 400lbs	45kg / 100lbs
6	9,75m / 32'-0"	180kg / 400lbs	45kg / 100lbs

MOTORS

2 motored chain block per truss

Modèle	Distribution
MB4.3/23T	Show Distribution

DANCE CARPET

Rosco	Black / White	12m x 1,6m	39'-3" x 5'-3"	7
-------	---------------	------------	----------------	---

WOODEN DANCE FLOOR

Resilient sprung floor, SUBFLOOR by Rosco

Total area	12m x 9,5m	39'- 2 ¾" x 32'-2 ¾"	
Height	5 cm	2"	
Panels	1,07m x 1,07m	42" x 42"	99
Perimeter	2,2m x 0,10m	84" x 4 ½"	18
Corner	0,53m x 0,10m	21" x 4 ½"	4

STAGE CURTAINS

Some equipments are in shared inventory between the two venues of the theatre, please check their availability.

All curtains are fireproof black velvet.

LEGS

3 m x 7,60 m	10'-0" x 25'-0"	8
4,55 m x 7,60 m	15'-0" x 25'-0"	6

BORDERS

18,30 m x 1 m	60'-0" x 3'-0"	4
18,30 m x 1,50 m	60'-0" x 5'-0"	4
18,30 m x 2,45 m	60'-0" x 8'-0"	6
18,30 m x 3,65 m	60'-0" x 12'-0"	4

BACKDROPS

9,75 m x 7,60 m	32'-0" x 25'-0"	4
-----------------	-----------------	---

TRAVELLERS

18,30 m de large*	60' de large*	1
18,0 m de large*	59' de large*	1

*Central or side opening.

NAVY SCRIM

13,7m x 6,7m	45'-0" x 24'-0"	2
--------------	-----------------	---

CYCLORAMA

PVC anthracite gray	17,2m x 7,8m	45'-5" x 25'-7"	1
Beige muslim	12,2m x 7,3m	40'-0" x 24'-0"	1

STAGE LIGHTING

Some equipments are in shared inventory between the two venues of the theatre, please check their availability.

STAGE LIGHTING CONTROL

DMX 2 universe protocols.

Lighting desk	Element 2 – 1024 out	ETC	1
Power	Dimmers 2,4kw	Strand C2I	48
Power	Dimmers 2,4kw	Strand CD80	24
OptoSplitter	1 in DMX5 – 8 out DMX5	Chauvet	1

LIGHTING EQUIPMENTS

PROFILES

Type	Quantity of spotlights	Lens	Quantity of lens
ETC Source4 750W	20	19°	10
		36°	10
ETC Source4 750W	15	25°/50°	15

FRESNELS

Type	Lens	Quantity
Strand Fresnel 1000W	13°/65°	16

PAR

Type	Quantity of spotlights	bulb	Quantity of bulb
PAR 64 Altman SSI 1000W	10	Medium	10

LIGHTING EQUIPMENTS - DEL

Colorado 2 Quad Zoom	Chauvet	31
----------------------	---------	----

SMOKE MACHINES

Haze generator	MDG Max 3000	1
Fog generator	ChauvetDJ Hurricane 2000	1

ACCESSORIES

Gobo holder	ETC Source4	50
Gobo holder	Robert Juliat	24
Iris	ETC Source4	7
Iris	Robert Juliat	11
Gels	Roscolux	Lot
Gels	Lee	Lot
Barndoor	Strand Fresnel 1000W	16

BOOMS

Round base plate threaded	13
Steel pipes. Exterior diameter 2”	Lot of 2’, 3’, 4’, 6’, 8’, 10’, 12’, 14’, 16’, 21’
Floor base (steel)	22

ELECTRICITY POWER

The standard electric voltage in the theatre is 120 Volts / 60 Hz.

Power panel with male Posi Lock outlet by Cam Lock	400 amps
	120 / 208 volts, 3ø
Power panel with male Posi Lock outlet by Cam Lock	200 amps
	120 / 208 volts, 3ø, isolated by ground

*Please check the availability of the Power panels.

SOUND

Some equipments are in shared inventory between the two venues of the theatre, please check their availability.

MIXING BOARD

Behringer X32 Compact	Board 16 in	16 in + 8 out	1
Behringer SD8	Stagebox	8 in + 8 out	1
Midas Venice 320	Board 32 channel	32 mic/line, 4 stéréo, 6 aux, 4 sub, 4 out	1
Mackie 1402-VLZ PRO	Board 14 in	6 mic, 4 stéréo, 2 aux, 2 out	2

MAIN SOUND SYSTEM

Main speakers	d&b Y7P (75° x 40°)	4
Subwoofers	d&b QSUB cardio	2
Power amplifiers	d&b D12	1
Adjustable delay/EQ on each channel	d&b 30D	1
Speakers stands		10

MICROPHONES AND DIRECT BOX

Cardioid dynamic microphone	Shure SM58	10
Cardioid dynamic microphone	Shure SM57	2
Cardioid static microphone	AKG CK91	2
Cardioid static microphone	Rode NT-5	2
Passives direct boxes	Radial JDI	8
Stereo passive direct boxes	Radio JDI AV2 *For multimédia	1
Stereo passive direct boxes	Digiflex DSPDI	2

MIC STANDS

Stand with boom - High	15
Stand with boom - Short	3
Atlas stand	5

WIRELESS MICROPHONE SYSTEM

4 channels only 518 @ 758 Mhz

Receptor	Shure ULXD 4D	1
	Shure UR4D+	2
	Shure SLX4	1
	Shure SLX 288	1
Bodypack	Shure UR1	2
Handheld microphones	Shure SM58 Bêta	1
	Shure SM58 UR2	4
	Shure PG58	2
Headset cardioid microphone	Shure WH20 (black)	2
	DPA 4088 (beige)	2
Omnidirectional lavalier microphones	DPA 4060 (black)	2

INTERCOM

Wired Intercom		
Main Base	Clear-com MS-222	1
Headset	Production intercom	6
Mobile wired intercom	Production intercom	6
Wireless Intercom		
Main Base (maximum 4 transmitters)	Clear-com HDME DX-210	1
Wireless headset	Clear-com WH210	3
Wireless beltpack with headset	Clear-com BP210	1

COMPUTER

Portable computer	Macbook Pro 2022	1
	Macbook Air 20222	1
Soundcard Dante 64 In and Out	Dante Virtual soundcard	1

VIDEO

Some equipments are in shared inventory between the two venues of the theatre, please check their availability.

VIDEO PROJECTORS

Video projector 16K - Laser		Christie D16HD-HS 1-DLP	1
Video projector 12K - Laser		Christie D12WU-H	1
Lens Christie	Lens 0.84 – 1.02	Christie 140-114107-01	1
	Lens 1.02 – 1.36	Christie 140-115108-01	1
	Lens 1.2 – 1.5	Christie 140-109101-01	1
	Lens 1.5 – 2.0	Christie 140-110103-01	1
	Lens 2.0 – 4.0	Christie 140-114107-01	1
Video projector 5K		Panasonic PTDW-5100U	2
Lens Panasonic	Lens 1.3 – 1.8	ET-DLE100	2
	Lens 1.8 – 2.5	TKGF0109-1	1
Video projector 6.5K		Epson G6150	1
Lens Epson	Lens Short-throw	Epson ELPLU03S	1
	Lens Middle-throw	Epson ELPLM15	1

PROJECTION SCREEN

Projection screen front or back (4 : 3) With frame	3m x 2,3 m	10'-0" x 7'-6"	1
Projection screen front white (4 : 3) With frame	4,6m x 3,3m	14'-0" x 10'-6"	1
Projection screen front (16 : 9) With frame	6,4m x 3,7m	21'-0" x 12'-3"	1
Projection screen front or back (16 : 9) PVC White creme	9m x 5m	29'-6" x 14'-4"	1
Projection screen front or back <i>Peroni : PLB Blackout</i>	8,53m x 3,35m	28'-0" x 11'-0"	1
Projection screen front or back <i>Peroni : PLB Blackout</i>	12,50m x 3,35m	41'-0" x 11'-0"	1

VIDEO DISTRIBUTION

HDMI-SDI	Decimator MD-LX	2
HDMI-SDI	Decimator MD-HX	1
SDI in – HDMI out	BlackMagic Mini Converter	1

STAGE EQUIPMENTS

Some equipments are in shared inventory between the two venues of the theatre, please check their availability.

GROUND SUPPORT SYSTEM CURTAIN

SET #1

Bases and flanges	0,6m x 0,6m	2'-0" x 2'-0" x 1/4"	6
Vertical pipes	2,4m minimum	8'-0" minimum	6
Horizontal pipes	2,1m minimum	7'-0" minimum	5
Black velvet curtain	4m x 3m	13'-0" x 9'-11"	6

SET #2

Bases and flanges	0,6m x 0,6m	2'-0" x 2'-0" x 1/4"	6
Vertical pipes	2,4m minimum	8'-0" minimum	6
Horizontal pipes	2,1m minimum	7'-0" minimum	5
Black velvet curtain	4m x 3m	13'-0" x 9'-11"	6